

SCV-7.55


Variable Type Vacuum Capacitor (VM Type)

Specification

Peak Test Voltage	7.5kV,peak (at 50,60 Hz/ 1 minute)
RF Working Voltage	4.5 kV,peak (at 13.56 MHz)
Capacitance nominal	30 – 500 pF
Linear Variability	44±4pF/Turn (C≥40pF)
Maximum Current	100 A,rms (at 13.56 MHz)
Tuner Turns	12±1.0 Turns
Tuner Operating Torque	24.5 N·cm
Total Length	140 mm
Mounting Length	115 mm
Outer Diameter	φ62.4 mm
Weight	0.94 kg







Drawing

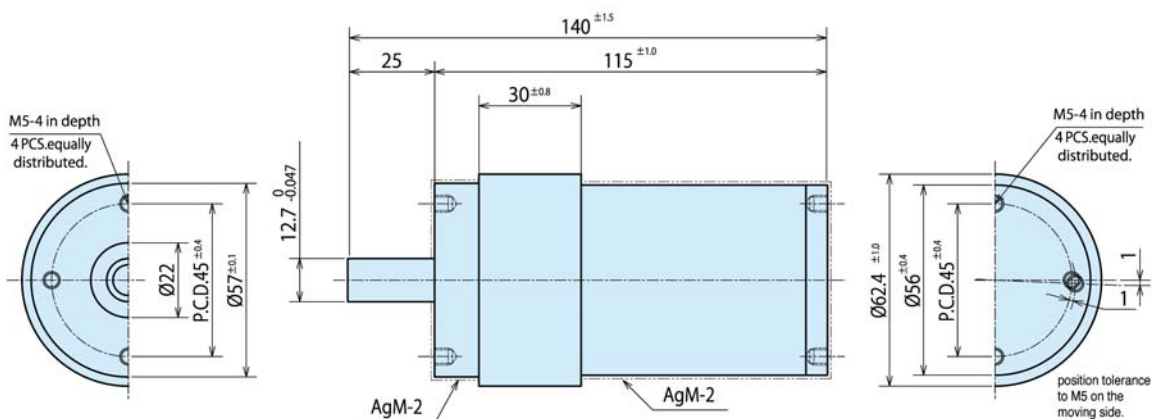

SCV-7.55

Variable Type Vacuum Capacitor (VM Type)

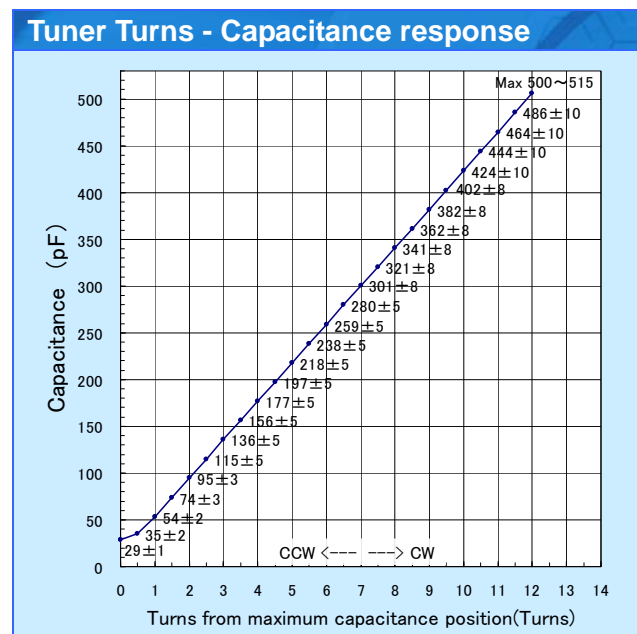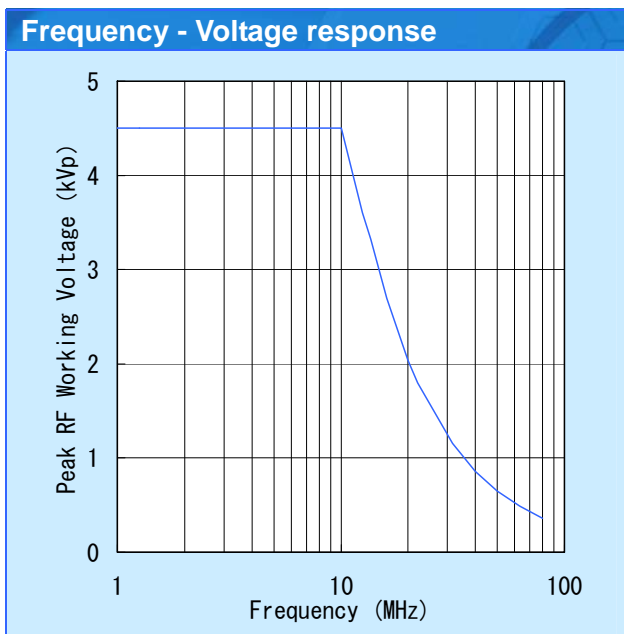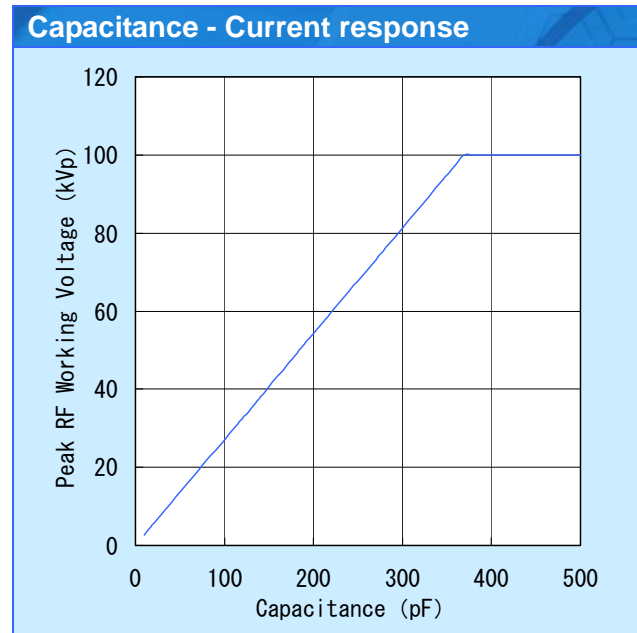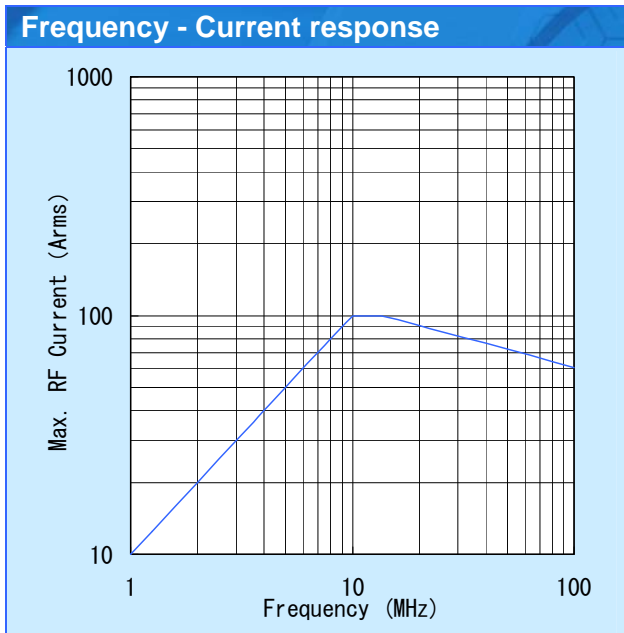

Notice:

- Current collecting system: Capacitor both-end full-face collection.
- Cooling System: Convection.
- Permissible surface temperature: 125°C.
(The surface temperature changes with current collecting conditions and ambient temperature.)
- Ambient temperature: 25°C.

MEIDENSHA CORPORATION

ThinkPark Tower 2-1-1 Oosaki, Shinagawa-ku, Tokyo, 141-6029 Japan
 Phone: 81-3-6420-7510 Facsimile: 81-3-5745-3053 URL: www.meidensha.co.jp