

SCV-1014G


Variable Type Vacuum Capacitor (VM Type)

Specification

Peak Test Voltage	10kV,peak (at 50,60 Hz/ 1 minute)
RF Working Voltage	6 kV,peak (at 13.56 MHz)
Capacitance nominal	90 – 1400 pF
Linear Variability	115±8 pF/Turn ($C \geq 150\text{pF}$)
Maximum Current	90 A,rms (at 13.56 MHz)
Tuner Turns	12±1.0 Turns
Tuner Operating Torque	24.5 N·cm
Total Length	140 mm
Mounting Length	115 mm
Outer Diameter	Φ73 mm
Weight	1.4 kg




Drawing

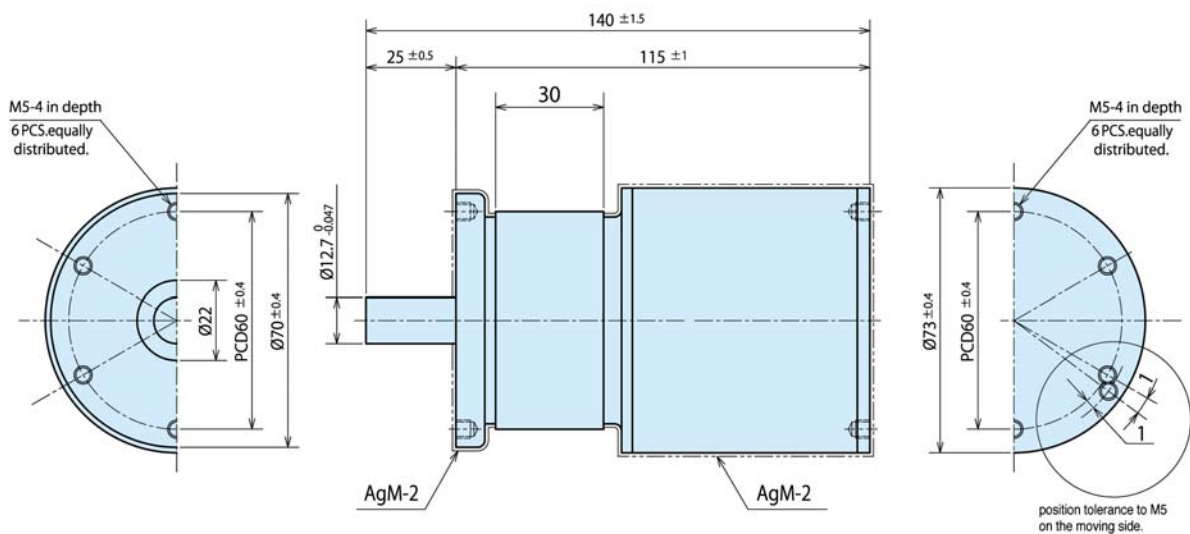


SCV-1014G

Variable Type Vacuum Capacitor (VM Type)


Frequency - Current response

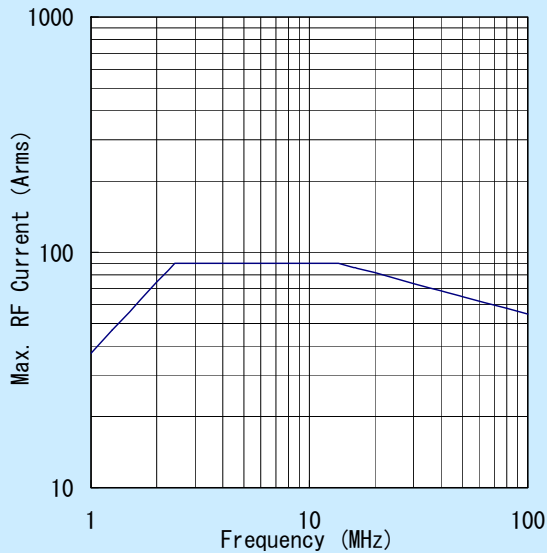


Capacitance - Current response

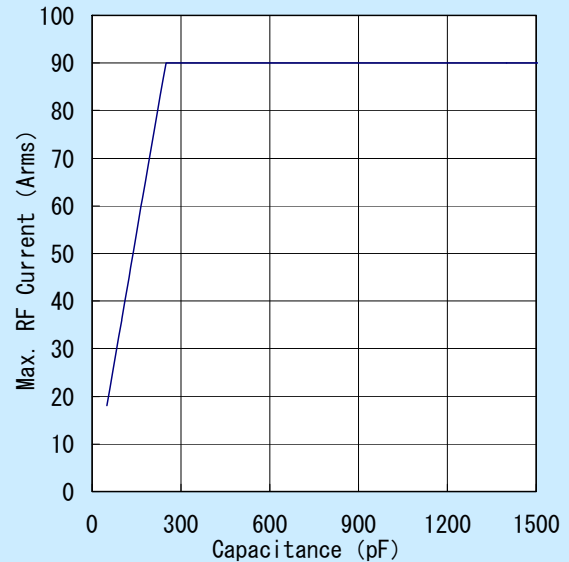

Frequency - Voltage response

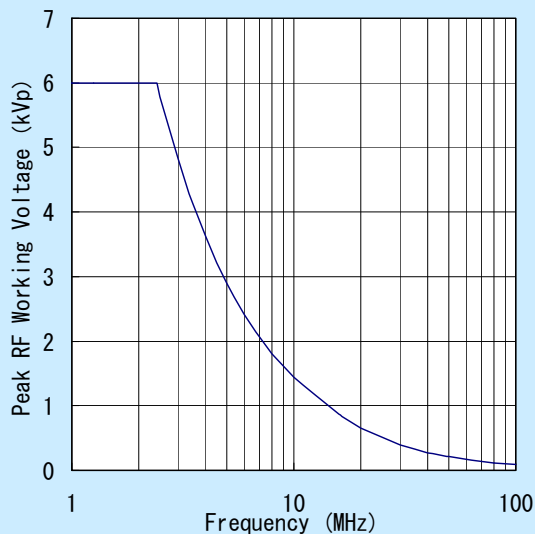

Tuner Turns - Capacitance response

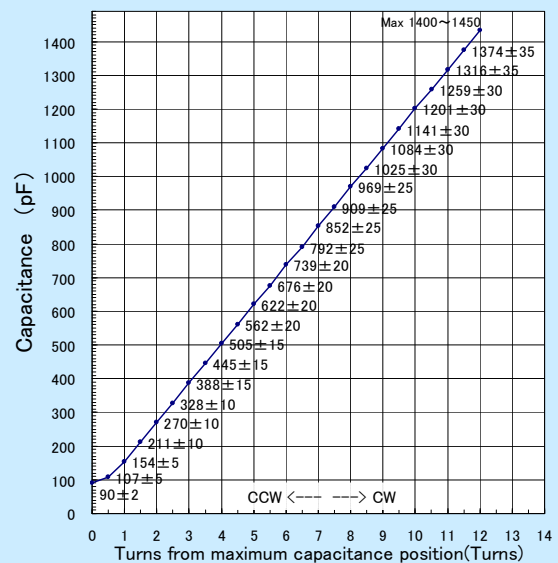

Notice:

- Current collecting system: Capacitor both-end full-face collection.
- Cooling System: Convection.
- Permissible surface temperature: 125°C.
(The surface temperature changes with current collecting conditions and ambient temperature.)
- Ambient temperature: 25°C.

MEIDENSHA CORPORATION